




## UNPACKING AND COMPONENTS

- Base
- Horizontal pillar
- Cross block with knobs
- Vertical post
- Safety lock collar
- Hex bolt
- Hex wrench

**Warnings:** Some components (especially the base) are very heavy, please handle with extra caution.

## INSTRUCTIONS


1. Carefully remove all parts from box and check for all package contents as listed above and shown below.

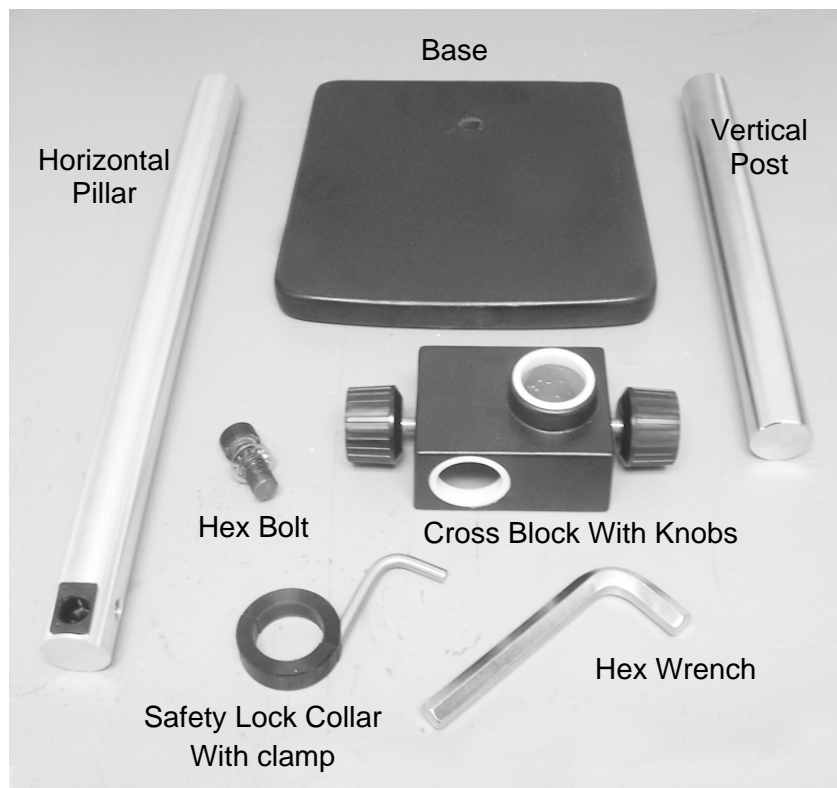


2. Place the base on the edge of a table as shown below. Use the hex bolt to attach the vertical post to the base, and tighten using the hex wrench provided.



3. Place the base on the table.

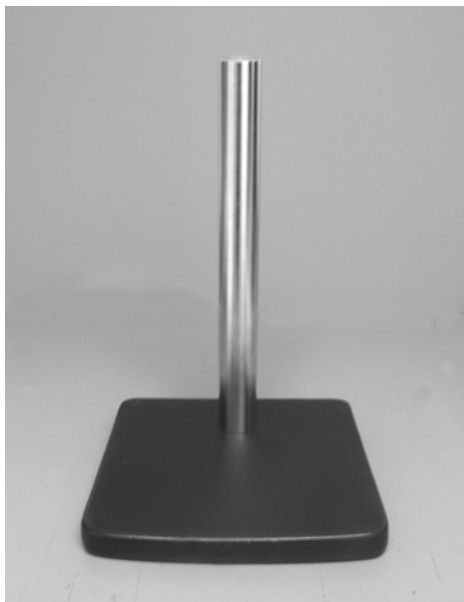


4. Insert the safety lock collar onto the vertical post and tighten/lock it using the clamp.

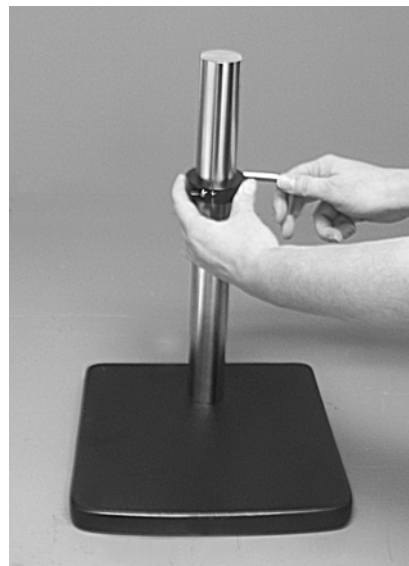


5. Slide the cross block onto the vertical post.



6. Adjust to the desired position.

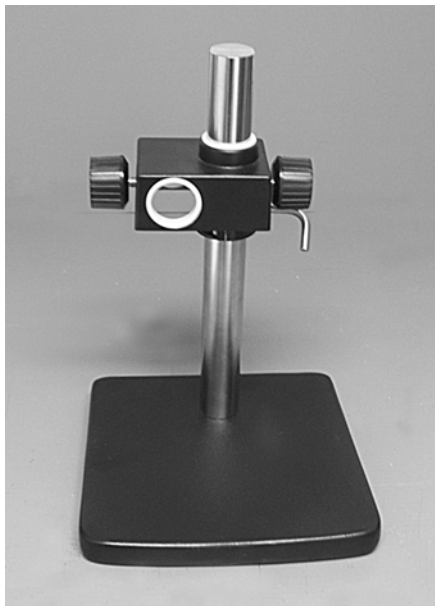

7. Slide the horizontal pillar into the cross block.

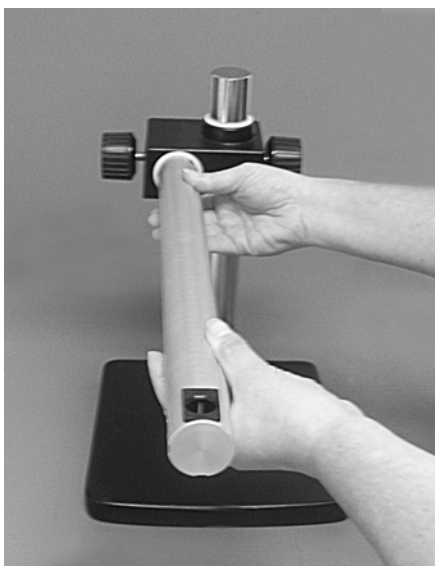

8. Set to desired position and tighten the cross block and horizontal pillar on both sides using the 2 knobs.

Assembly is complete.



Note: This boom stand is compatible with all UNITRON® stereo microscopes and accessories.

**E-ARM or FOCUS MOUNT SETUP**



1. Using a tool such as a long screwdriver, push to remove the e-arm/focus mount locking screw that is located at the end of the horizontal pillar.



2. Unscrew the e-arm/focus mount locking screw and set aside.



3. Insert the e-arm or focus mount into the end of the horizontal pillar; make sure the stud is completely inserted (see photo below, right).

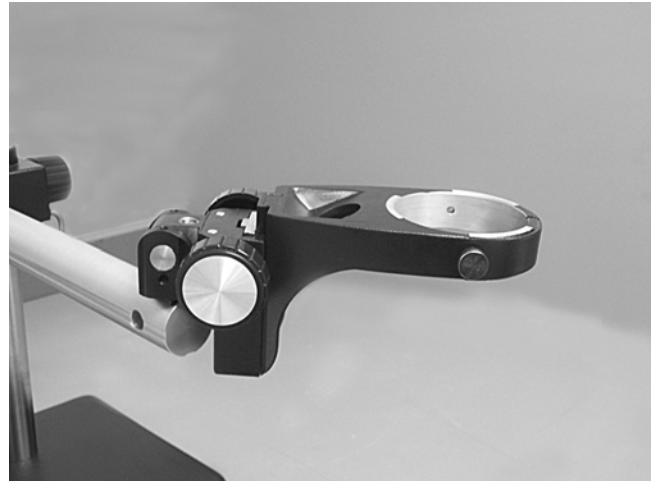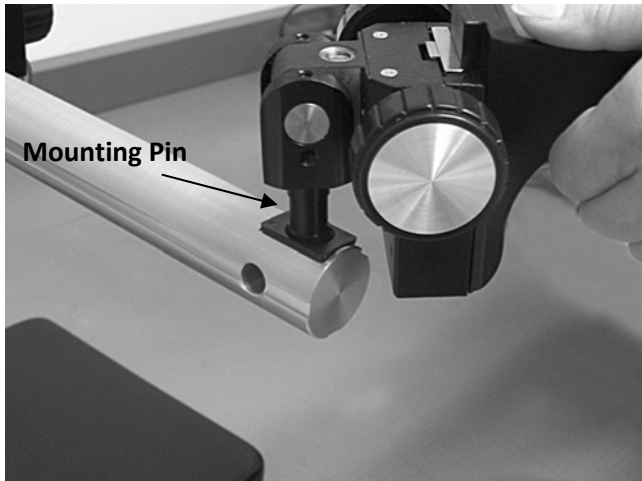

4. Adjust the e-arm or focus mount to desired position and then re-insert and tighten the e-arm/focus mount locking screw with the V grooves facing towards the mounting pin of the arm.

NOTE: the curved side faces the pin.



3. Assembly with e-arm or focus mount is complete.

